



SWAGED GRILLE & GRATING


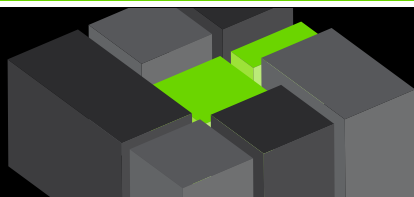


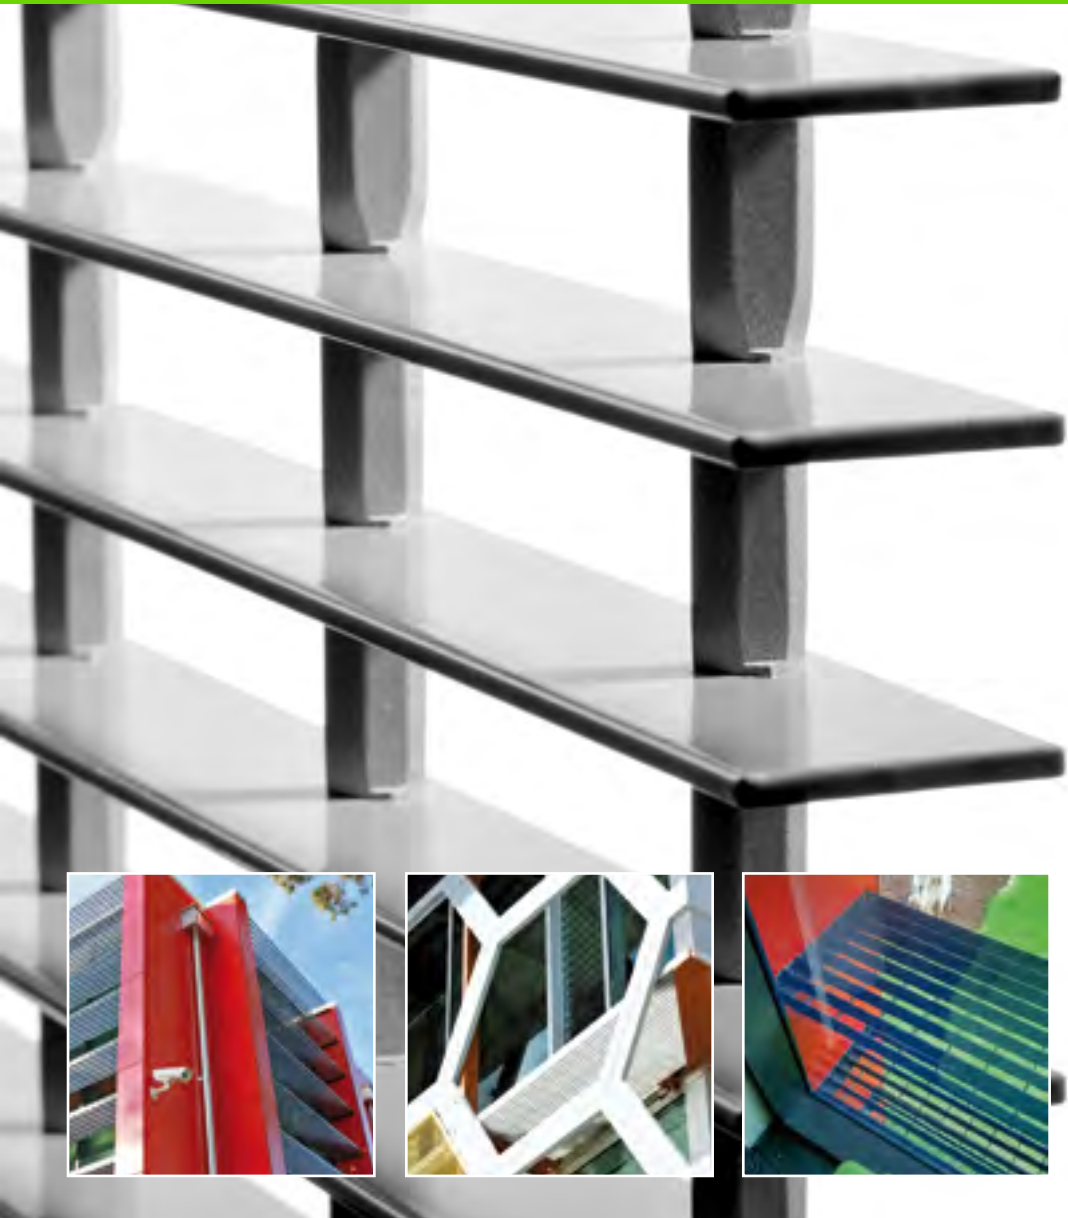

Swaged Grating

Product Code 3mm blades	Product Code 5mm blades	Toe Depth "X" (mm)	Thickness "Z" (mm)	Blade Pitch "Y" (mm)	Trafficable Yes / No
SG 253-30	SG 255-30	25	3/5	30	✓
SG 253-60	SG 255-60	25	3/5	60	X
SG 323-30	SG 325-30	32	3/5	30	✓
SG 323-60	SG 325-60	32	3/5	60	X
SG 403-30	SG 405-30	40	3/5	30	✓
SG 403-60	SG 405-60	40	3/5	60	X
SG 453-30	SG 455-30	45	3/5	30	✓
SG 453-60	SG 455-60	45	3/5	60	X
SG 503-30	SG 505-30	50	3/5	30	✓
SG 503-60	SG 505-60	50	3/5	60	X
SG 553-30	SG 555-30	55	3/5	30	✓
SG 553-60	SG 555-60	55	3/5	60	X
SG 603-30	SG 605-30	60	3/5	30	✓
SG 603-60	SG 605-60	60	3/5	60	X
SG 653-30	SG 655-30	65	3/5	30	✓
SG 653-60	SG 655-60	65	3/5	60	X
SG 753-30	SG 755-30	75	3/5	30	✓
SG 753-60	SG 755-60	75	3/5	60	X

Please Note: Standard swaged load bar spacing is 100mm. 200mm spacing is also available – please use prefix "SG2" to specify. *90mm & 120mm blade pitch ("y") is also available. Use suffix "-90" or "-120" as required.

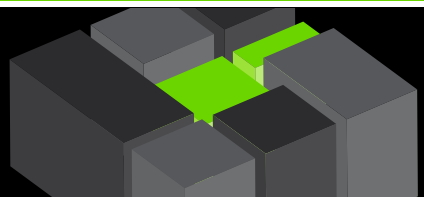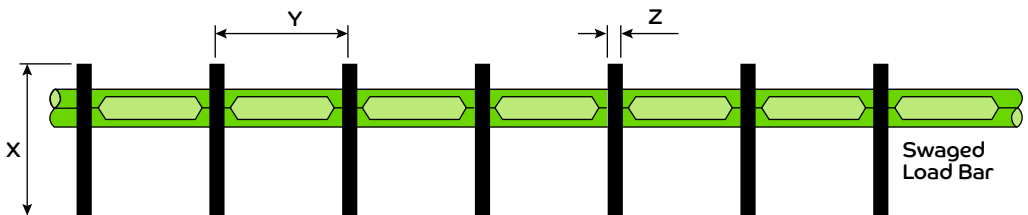





Swaged Louvres

Product Code	Blade Drop "W" (mm)	Toe Depth "X" (mm)	Blade Angle A°	Blade Pitch "Y" (mm)	Thickness "Z" (mm)	Trafficable Yes / No
SL 6032/100-60	60	32	100°	60	3	X
SL 4520/135-30	45	20	135°	30	3	X
SL 4520/135-60	45	20	135°	60	3	X
SL 6020/135-30	60	20	135°	30	3	X
SL 6020/135-60	60	20	135°	60	3	X
SL 6032/135-30	60	32	135°	30	3	✓
SL 6032/135-60	60	32	135°	60	3	X
SL 6040/135-30	60	40	135°	30	3	✓
SL 6040/135-60	60	40	135°	60	3	X
SL 8020/135-30	80	20	135°	30	3	X
SL 8020/135-60	80	20	135°	60	3	X
SL 8032/135-30	80	32	135°	30	3	✓
SL 8032/135-60	80	32	135°	60	3	X
SL 6032/160-30	60	32	160°	30	3	✓
SL 6032/160-60	60	32	160°	60	3	X

Please Note: Standard swaged load bar spacing is 100mm. 200mm spacing is also available – please use prefix "SL2" to specify. *90mm & 120mm blade pitch ("y") is also available. Use suffix "-90" or "-120" as required.

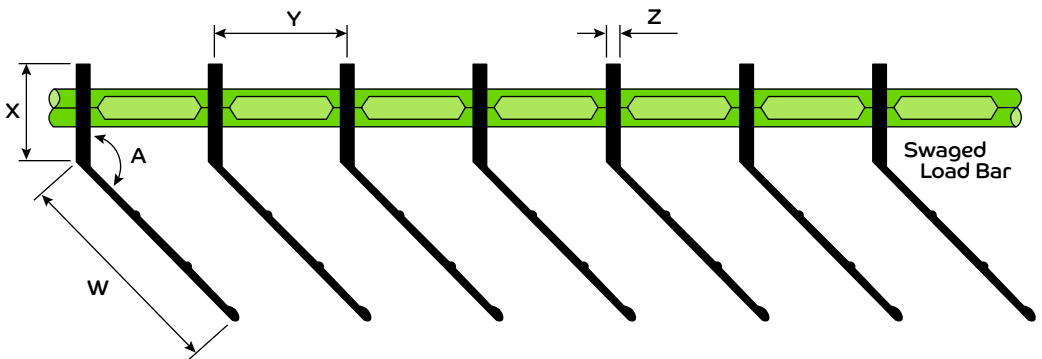


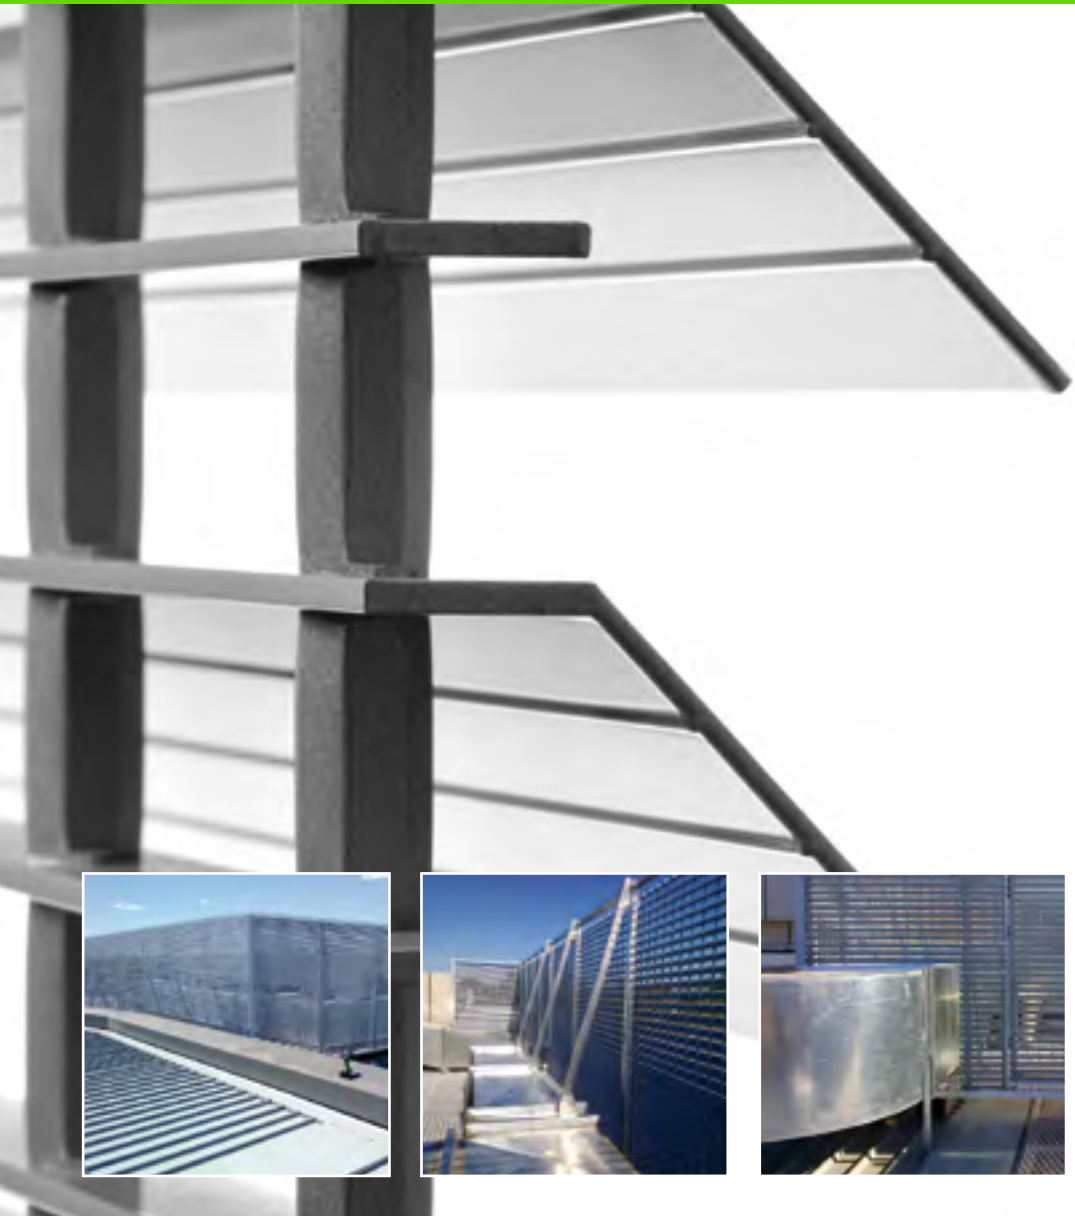

Trafficable Swaged Louvres

Product Code	Blade Drop "W" (mm)	Toe Depth "X" (mm)	Blade Angle A°	Blade Pitch "Y" (mm)	Thickness "Z" (mm)	Trafficable Yes / No
TL 6020/135-60	60	20	135°	60/30	3	✓
TL 6032/135-60	60	32	135°	60/30	3	✓
TL 6040/135-60	60	40	135°	60/30	3	✓
TL 8020/135-60	80	20	135°	60/30	3	✓
TL 8032/135-60	80	32	135°	60/30	3	✓

Please Note: Standard swaged load bar spacing is 100mm. 200mm spacing is also available – please use prefix "TL2" to specify.

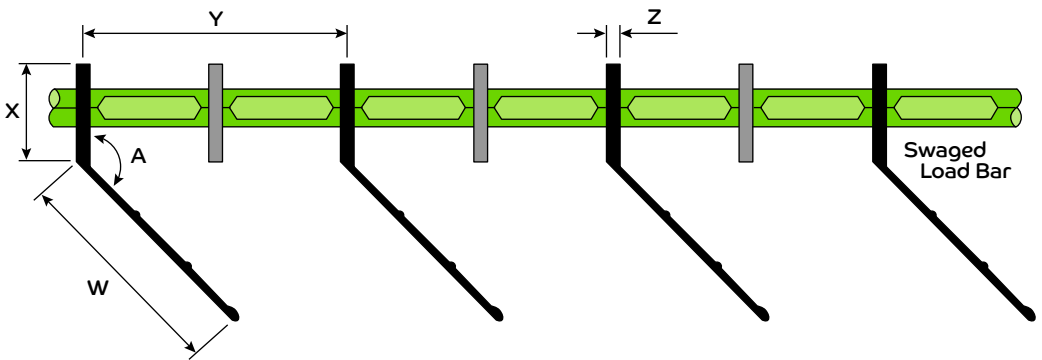



Gitter Group Pty Ltd

Phone: 02 4677 2220 Fax: 02 4677 2230

Email: info@gittergroup.com

Specialising in:

- Sunscreen & shading system components
- Privacy & ventilation system components

